



SCALE: 1:1

12.55 ± 0.2

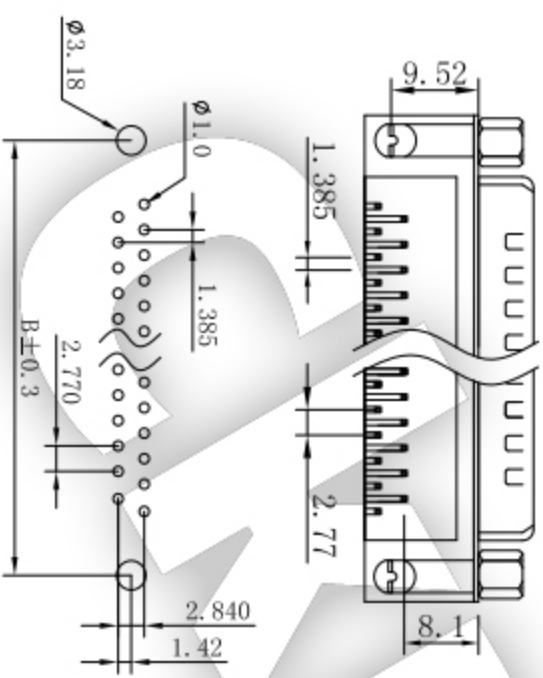

P.C.B LAYOUT



Poles	Part No.	Dim A	Dim B	Dim C	Dim D	Dim E
9	DMR-9P	16.92	24.99	30.81	11.08	6.955
15	DMR-15P	25.25	33.32	39.14	19.39	6.965
25	DMR-25P	38.96	47.04	53.04	33.24	6.90
37	DMR-37P	55.42	63.50	69.32	49.86	6.82

MATERIAL & FINISHES
 INSULATOR - PBT GLASS FILLED UL94V-0
 CONTACT- BRASS
 SHELL - STEEL
 PLATING - CONTACT GOLD FLASH PLATED

ELECTRICAL CHARACTERISTICS
 RATING-CURRENT : 3A
 CONTACT RESISTANCE : <15mΩ
 INSULATION RESISTANCE : <3000MΩ AC 500V
 DIELECTRIC VOLTAGE : 1000V /MIN
 OPERATING TEMPERATURE : -50° C TO+105° C

APPROVED:	DATE:	TITLE:			
CHECKED:	DATE:	DMR-XP 公头 铆合锁螺丝			
DRAWN:	DATE:	CLIENT P/N	UNIT	SCALE	Free
LYF	2008-04-07	/	mm	DMR-XP	Free
TOLERANCE TABLE		FILE NO.	CMktw-DMR-0004	REV.	A
.0	±0.20				
.00	±0.10				
.000	±0.05				

深圳市灿科盟实业有限公司
 CHANKLEMENT INDUSTRYCO., LTD