




FRONT VIEW

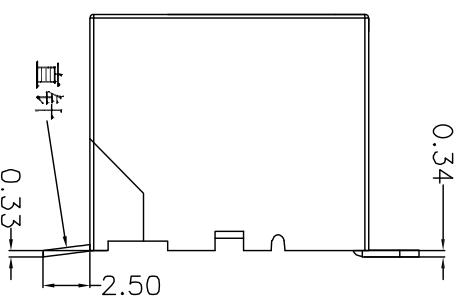


RIGHT SIDE VIEW

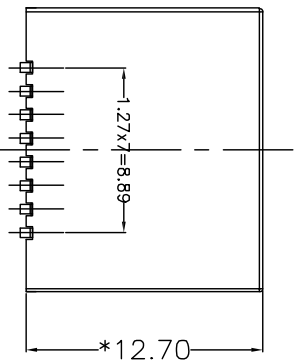

BOTTOM VIEW

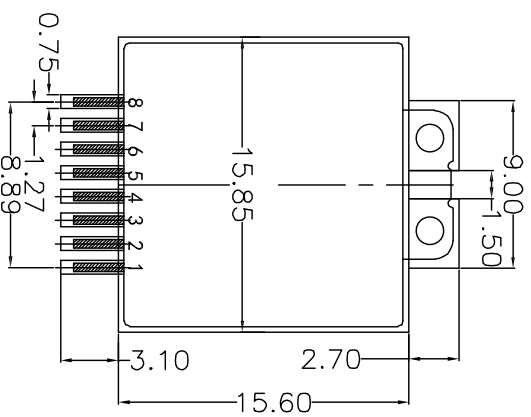

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

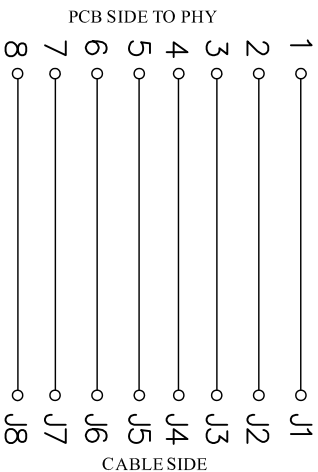

MATERIAL:
HOUSING: PA9T, UL94V-0, BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.30MM,
6U" GOLD PLATING ON CONTACT AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C ~ +85°C.
STORAGE TEMPERATURE: -40°C ~ +85°C.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

APPROVED:		DATE:		TITLE:	
CHECKED:		DATE:		深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD	
DRAWN:		DATE:		CLIENT P/N	
L. YUN		2020-04-22		R-RJ45N08P-A001	
TOLERANCE TABLE		UNT		SCALE	
.0		mm		free	
.00		REV. A		KY00	
±0.30					
±0.20					
±0.05					

网口插座 RJ45-8P/8C TAB-UP SMT 全塑 180直贴面